

DC12-120SA(12V114Ah)



Specification

| | |
|------------------------------------|--|
| Cells Per Unit | 6 |
| Voltage Per Unit | 12 |
| Capacity | 114Ah@20hr-rate to 1.75V per cell @25°C |
| Weight | Approx. 29.0 Kg (Tolerance ±3.0%) |
| Internal Resistance | Approx. 5.5 mΩ |
| Terminal | F5(M8)/F12(M8) |
| Max. Discharge Current | 1140A (5 sec) |
| Design Life | 12 years (floating charge) |
| Max. Charging Current | 34.5 A |
| Reference Capacity | C3 87.2AH C5 98.2AH C10 108.6AH C20 114.0AH |
| Float Charging Voltage | 13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell |
| Cycle Use Voltage | 14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell |
| Operating Temperature Range | Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C |
| Normal Operating Temperature Range | 25°C ±5°C |
| Self Discharge | RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using. |
| Container Material | A.B.S. UL94-HB, UL94-V0 Optional. |



DC (Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharging. By using strong grids, thick plate and specially active material are designed for repeated deep-discharge applications. The DC series batteries offer 30% more cyclic life than the standby series. It is suitable for solar and wind renewable energy storage, mobility and medical equipment and cable TV etc.



ISO 9001



ISO 14001




OHSAS 18001



MH 28539



Dimensions

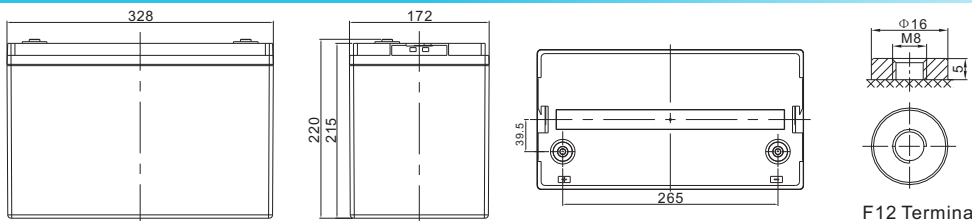

F12 Terminal

| | |
|--------------|-----------------------|
| Length | 328±2mm (12.9 inches) |
| Width | 172±2mm (6.77 inches) |
| Height | 215±2mm (8.46 inches) |
| Total Height | 220±2mm (8.66 inches) |
| Terminal | Value |
| M5 | 6~7 N*m |
| M6 | 8~10 N*m |
| M8 | 10~12 N*m |

Unit: mm

Constant Current Discharge Characteristics : A(25°C)

| F.V/Time | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V | 252.4 | 200.6 | 121.7 | 69.24 | 41.23 | 32.12 | 25.19 | 21.43 | 13.75 | 11.40 | 5.908 |
| 1.65V | 232.5 | 187.6 | 115.2 | 66.88 | 39.85 | 31.13 | 24.44 | 20.76 | 13.64 | 11.29 | 5.877 |
| 1.70V | 215.5 | 176.4 | 109.3 | 64.74 | 38.79 | 29.82 | 23.69 | 20.20 | 13.42 | 11.07 | 5.803 |
| 1.75V | 197.7 | 165.3 | 105.0 | 62.70 | 37.30 | 29.05 | 23.04 | 19.64 | 13.20 | 10.97 | 5.700 |
| 1.80V | 179.9 | 151.3 | 101.1 | 59.91 | 36.03 | 28.50 | 22.50 | 19.38 | 12.99 | 10.86 | 5.645 |
| 1.85V | 140.8 | 125.2 | 85.7 | 53.48 | 32.94 | 26.53 | 21.10 | 17.84 | 12.23 | 10.21 | 5.592 |

Constant Power Discharge Characteristics : WPC(25°C)


| F.V/Time | 10MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V | 429.9 | 350.0 | 221.1 | 130.0 | 77.96 | 60.99 | 48.56 | 40.57 | 26.79 | 22.36 | 11.80 |
| 1.65V | 413.9 | 340.3 | 215.9 | 127.8 | 75.86 | 59.47 | 47.37 | 39.47 | 26.57 | 22.14 | 11.69 |
| 1.70V | 386.3 | 322.1 | 205.5 | 124.0 | 73.96 | 57.19 | 45.87 | 38.48 | 26.25 | 21.71 | 11.58 |
| 1.75V | 359.5 | 304.0 | 198.3 | 120.6 | 71.33 | 55.78 | 44.79 | 37.60 | 25.82 | 21.50 | 11.37 |
| 1.80V | 331.2 | 281.0 | 191.9 | 115.6 | 69.71 | 55.47 | 43.93 | 37.10 | 25.39 | 21.28 | 11.27 |
| 1.85V | 262.7 | 236.1 | 164.6 | 103.9 | 64.19 | 51.74 | 41.34 | 34.32 | 24.00 | 20.10 | 11.16 |

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₂₀ should reach 95% after the first cycle and 100% after the third cycle.


DC12-120SA(12V114Ah)




Discharge Characteristics Curve

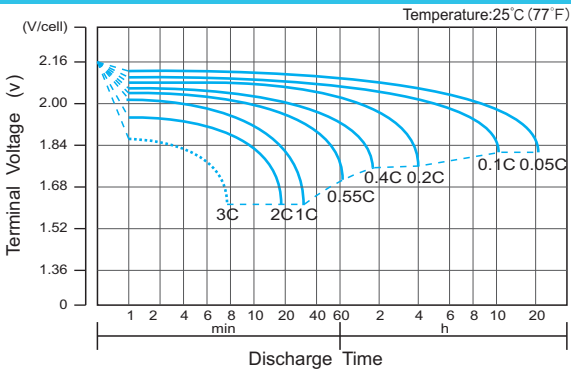


Charge Characteristic Curve for Cycle Use(IU)

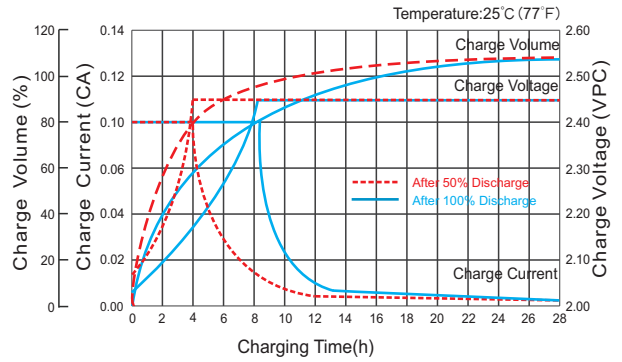


Cycle Life in Relation to Depth of Discharge

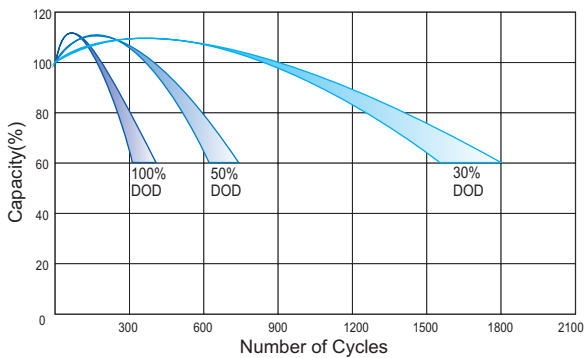


Relationship Between Charging Voltage and Temperature

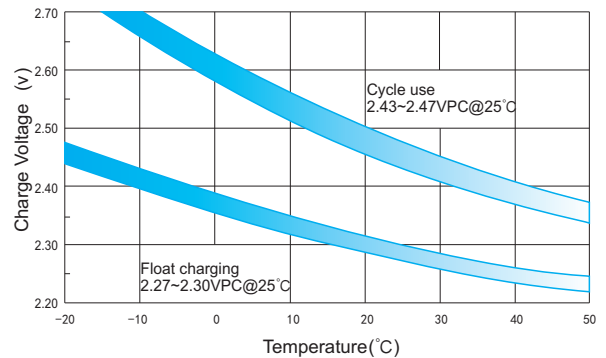


Temperature Effects on Capacity

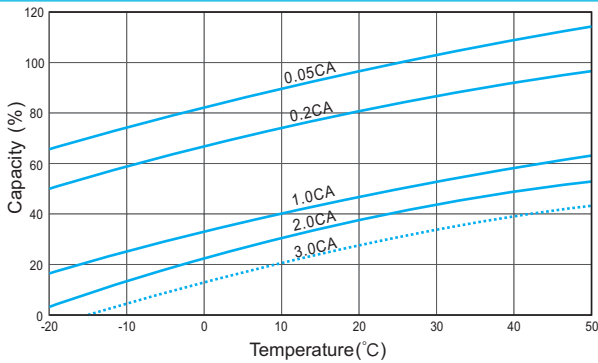


Storage Characteristics

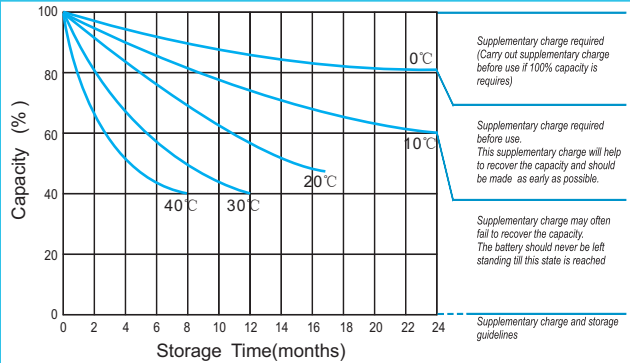

Effect of Temperature on Long Term Life

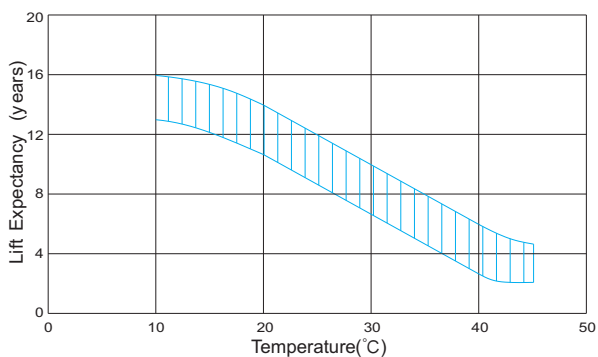

Relationship of OCV And State of Charge(20°C)

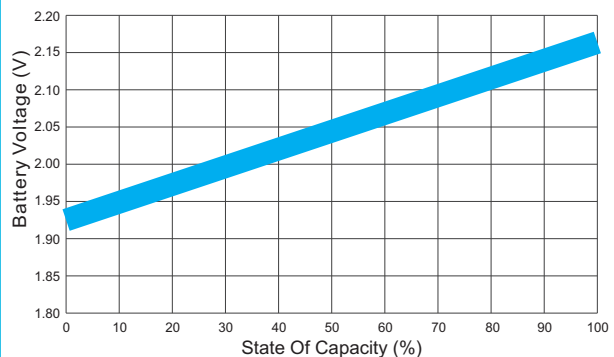

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.