

DC12-50(12V50Ah)



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	50Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 15.5 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 7.0 mΩ
Terminal	F11(M6)/F15(M6)
Max. Discharge Current	500A (5 sec)
Design Life	12 years (floating charge)
Max. Charging Current	15.0 A
Reference Capacity	C3 38.2AH C5 43.1AH C10 47.6AH C20 50.0AH
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



DC (Deep Cycle) series batteries provide superior high integrity and reliability. It is specially designed for frequent cyclic charge and discharging. By using strong grids, thick plate and specially active material are designed for repeated deep-discharge applications. The DC series batteries offer 30% more cyclic life than the standby series. It is suitable for solar and wind renewable energy storage, mobility and medical equipment and cable TV etc.



ISO 9001



ISO 14001




OHSAS 18001



MH 28539



Dimensions

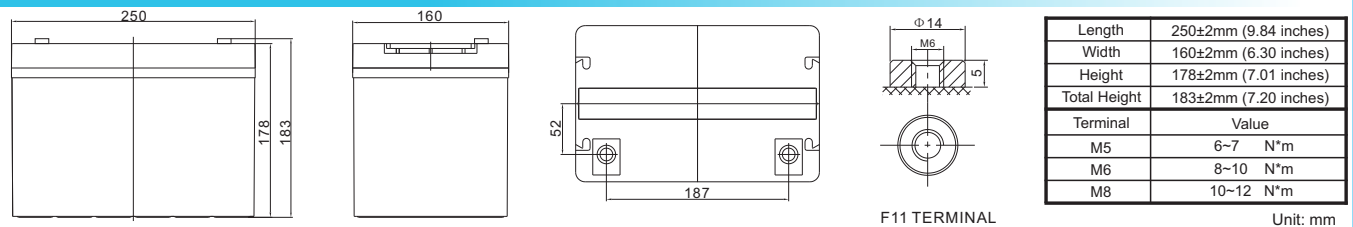

Constant Current Discharge Characteristics : A(25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	121.4	92.28	54.45	30.37	18.08	14.09	11.05	9.399	6.029	5.000	2.591
1.65V	111.8	86.30	51.58	29.33	17.48	13.65	10.72	9.104	5.981	4.952	2.577
1.70V	103.6	81.16	48.91	28.39	17.01	13.08	10.39	8.858	5.886	4.857	2.545
1.75V	95.09	76.02	46.98	27.50	16.36	12.74	10.11	8.612	5.791	4.810	2.500
1.80V	86.53	69.61	45.24	26.28	15.80	12.50	9.869	8.500	5.696	4.762	2.476
1.85V	67.71	57.60	38.36	23.46	14.45	11.63	9.256	7.824	5.364	4.476	2.453

Constant Power Discharge Characteristics : WPC(25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	206.7	161.0	98.94	57.01	34.19	26.75	21.30	17.79	11.75	9.806	5.173
1.65V	199.1	156.5	96.62	56.03	33.27	26.08	20.78	17.31	11.66	9.711	5.127
1.70V	185.8	148.2	91.97	54.39	32.44	25.08	20.12	16.88	11.51	9.523	5.081
1.75V	172.9	139.8	88.75	52.88	31.29	24.46	19.64	16.49	11.33	9.429	4.989
1.80V	159.3	129.3	85.88	50.72	30.58	24.33	19.27	16.27	11.14	9.334	4.942
1.85V	126.4	108.6	73.66	45.55	28.15	22.69	18.13	15.05	10.53	8.816	4.896

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


DC12-50(12V50Ah)




Discharge Characteristics Curve

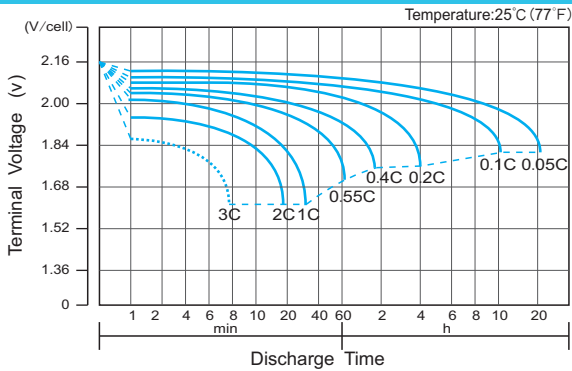


Charge Characteristic Curve for Cycle Use(IU)

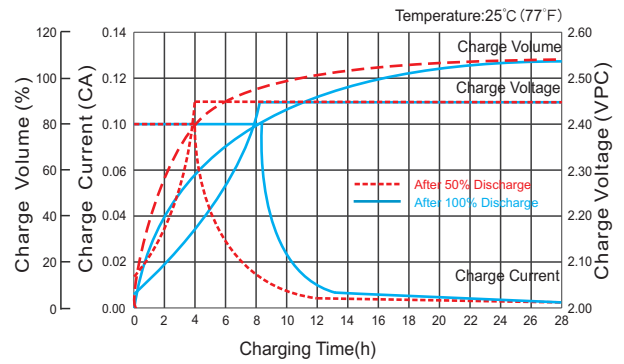


Cycle Life in Relation to Depth of Discharge

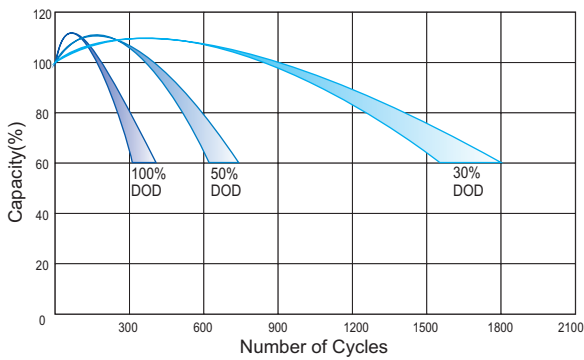


Relationship Between Charging Voltage and Temperature

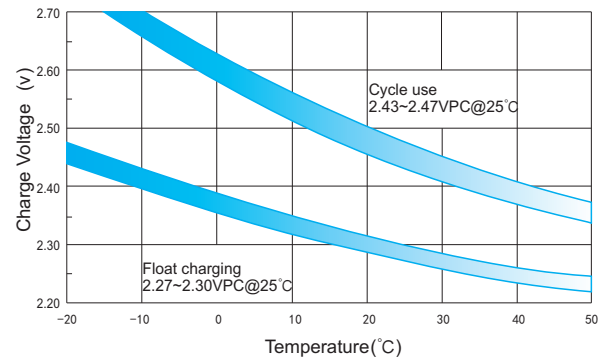


Temperature Effects on Capacity

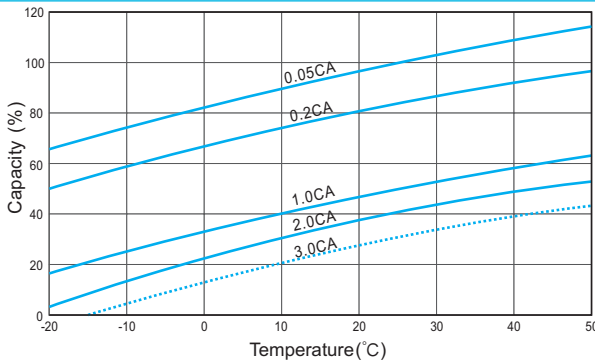

Storage Characteristics

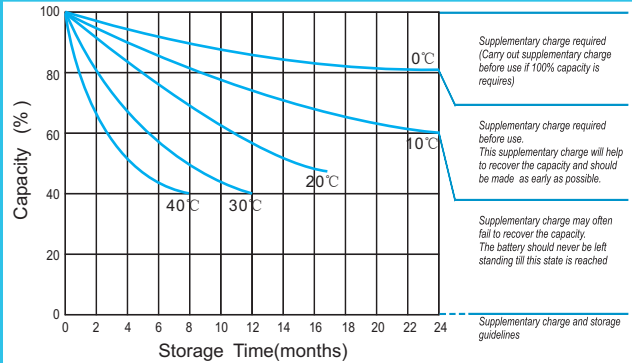

Effect of Temperature on Long Term Life

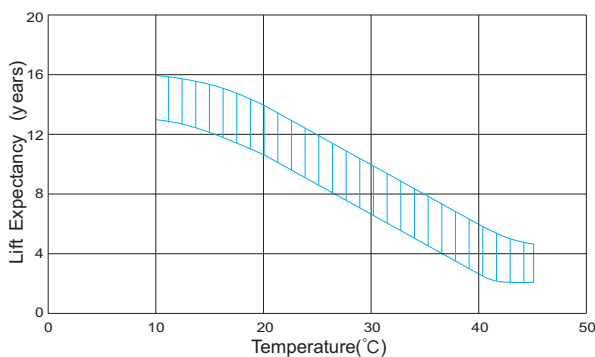

Relationship of OCV And State of Charge(20°C)



(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.