



HR12-20W(12V20W)

Specification



HR (High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids, thick plate and specially designed active material. It is with lower I.R, lower self discharge rate, high power, and longer service life. The HR series battery offers 30% more power output than the standard series. It is suitable for high power standby used, such as datacenter, UPS, EPS etc.




ISO 9001 ISO 14001 OHSAS 18001



MH 28539

Cells Per Unit	6
Voltage Per Unit	12
Capacity	20W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 1.51 Kg (Tolerance ±5.0%)
Internal Resistance	Approx. 36 mΩ
Terminal	F2
Max. Discharge Current	50A (5 sec)
Short Circuit Current	275A
Design Life	Could Reach 8 years
Max. Charging Current	1.5 A
Reference Capacity	C10 4.6AH C20 5.0AH
Standby Use Voltage	13.7 V~13.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Equalization Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

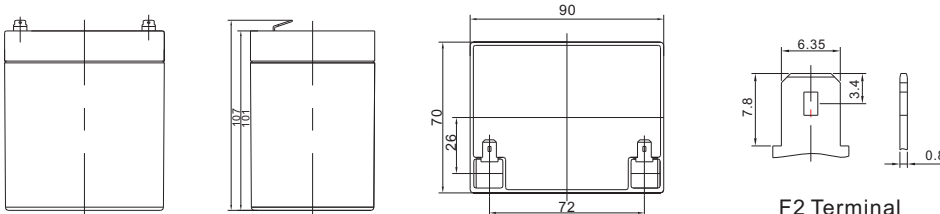

F2 Terminal

Length	90±1.5mm (3.54 inches)
Width	70±1.5mm (2.76 inches)
Height	101±1.5mm (3.98 inches)
Total Height	107±1.5mm (4.21 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	26.08	22.92	18.32	15.70	11.58	9.104	6.487	3.638	2.579
1.67V	23.67	20.80	16.75	14.47	10.83	8.594	6.147	3.467	2.468
1.70V	22.64	19.91	16.08	13.95	10.50	8.364	5.995	3.392	2.422
1.75V	20.97	18.44	14.98	13.07	9.917	7.947	5.744	3.278	2.349
1.80V	19.21	16.89	13.85	12.19	9.417	7.573	5.494	3.155	2.266
1.85V	16.43	14.44	11.80	10.35	8.075	6.577	4.858	2.852	2.072

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	46.87	41.20	33.03	28.42	21.17	16.76	11.99	6.821	4.882
1.67V	43.06	37.85	30.62	26.58	20.00	16.00	11.54	6.565	4.716
1.70V	41.58	36.55	29.63	25.79	19.58	15.66	11.27	6.461	4.642
1.75V	38.89	34.18	27.92	24.47	18.67	15.06	10.92	6.281	4.522
1.80V	36.10	31.73	26.12	23.07	17.83	14.46	10.56	6.101	4.403
1.85V	31.37	27.57	22.57	19.82	15.50	12.68	9.395	5.552	4.043

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


HR12-20W(12V20W)




Discharge Characteristics Curve

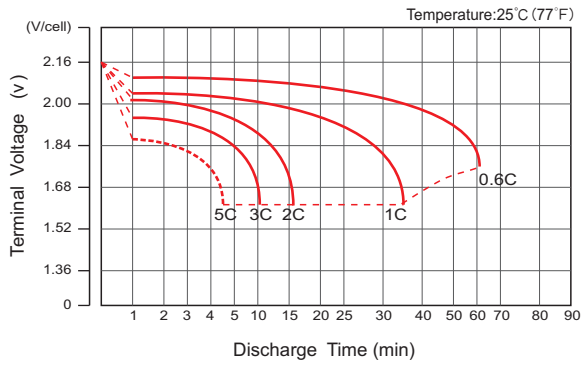


Charge Characteristic Curve For Standby Use

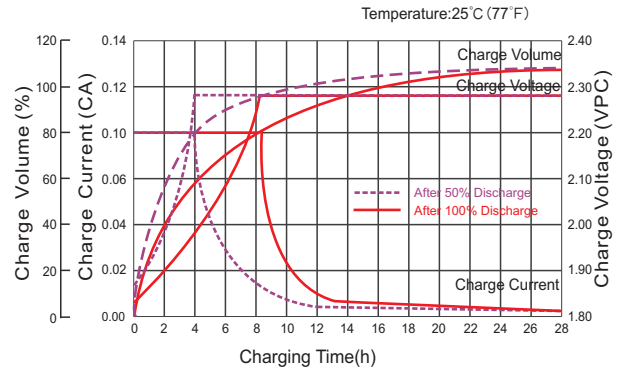


Storage Characteristics

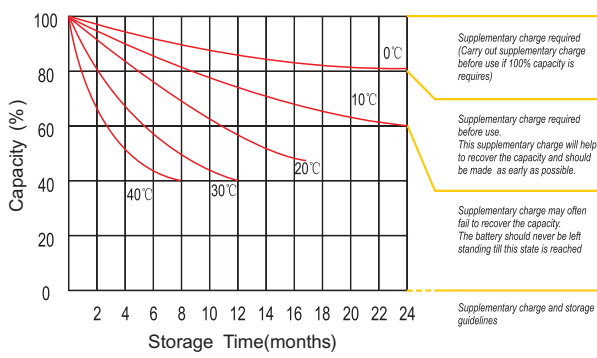


Relationship Between Charging Voltage And Temperature

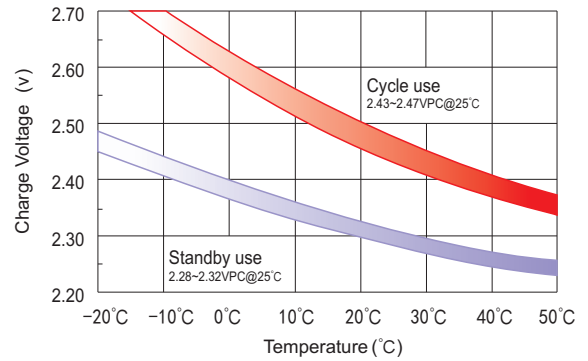


Temperature Effects On Capacity

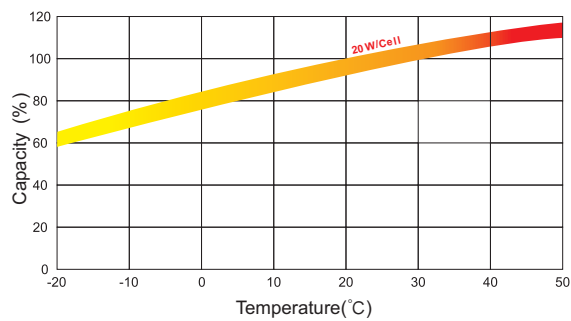


Relationship of OCV And State of Charge(20°C)

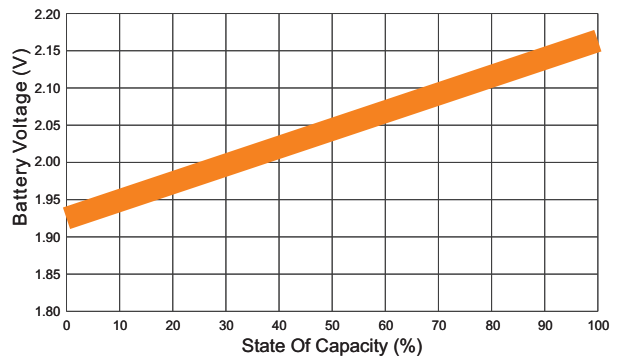

Effect Of Temperature On Long Term Life

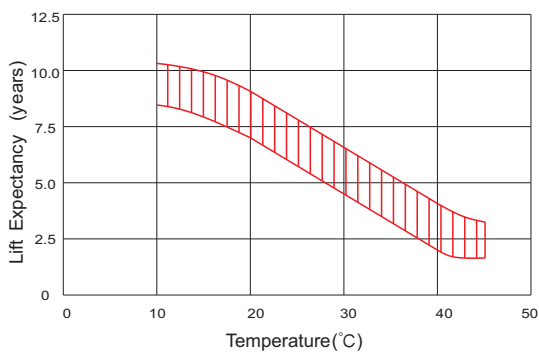

Life Characteristics Of Standby Use

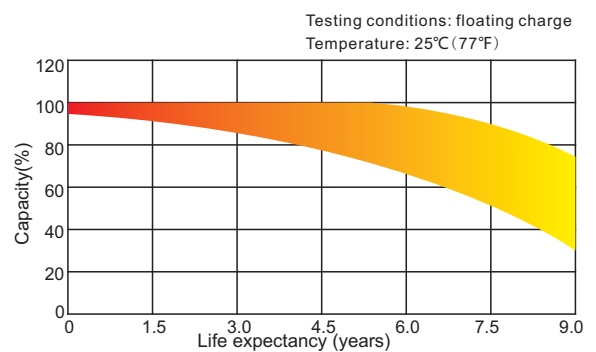

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.