



RA6-180(6V180Ah)

Specification

Cells Per Unit	3
Voltage Per Unit	6
Nominal Capacity	180Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 25.5 Kg (Tolerance ±3.0%)
Internal Resistance	Approx. 2.2 mΩ
Terminal	F12(M8)
Max. Discharge Current	1800A (5 sec)
Short Circuit Current	3330A
Design Life	12 years (Float charging)
Max. Charging Current	54.0 A
Reference Capacity	C3 139.2AH C5 157.0AH C10 180.0AH C20 190.8AH
Standby Use Voltage	6.80 V~6.90 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	7.30 V~7.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



RA series is a general purpose battery with 12 years design life in float service. It meets with IEC, JIS, BS, GB/T and YD/T standards. With advanced AGM valve regulated technology and high purity raw material, the RA series battery maintains high consistency for better performance and reliable standby service life. It is suitable for UPS/EPS, Telecom, power grid, medical equipment, emergency light and security system applications.



ISO 9001



ISO 14001



OHSAS 18001




MH 28539



G4M20206-0910-E-16

Dimensions

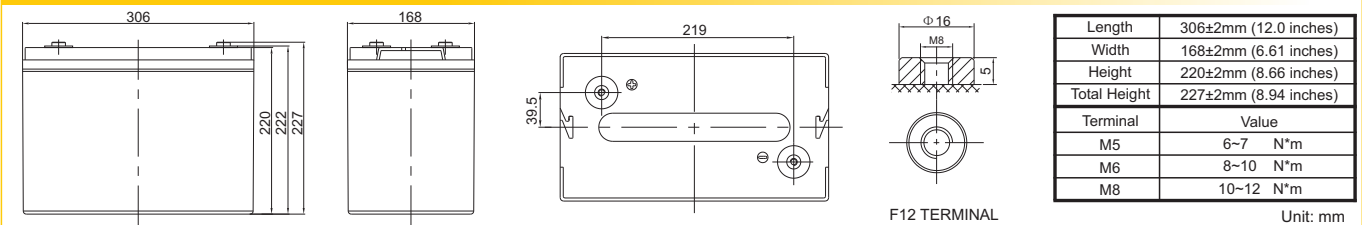

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	395.4	317.0	195.1	110.0	65.5	50.8	39.9	34.0	22.8	19.0	9.93
1.65V	373.6	303.1	187.3	106.2	63.4	49.2	38.8	33.1	22.6	18.8	9.78
1.70V	344.0	283.9	179.1	102.8	61.3	47.9	37.8	32.2	22.2	18.5	9.66
1.75V	314.8	264.2	171.2	99.0	59.2	46.4	36.8	31.4	21.9	18.2	9.54
1.80V	285.0	243.9	163.6	95.2	57.1	45.0	35.7	30.6	21.5	18.0	9.44
1.85V	232.9	202.4	140.9	85.4	52.3	41.6	33.2	28.5	20.2	16.9	8.97

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	672.1	554.3	354.4	206.7	124.2	97.0	76.6	65.5	44.6	37.3	19.6
1.65V	647.3	537.7	343.9	200.7	120.8	94.4	74.8	64.0	44.2	36.9	19.3
1.70V	606.9	511.2	332.0	195.4	117.5	92.2	73.1	62.6	43.6	36.4	19.1
1.75V	565.5	482.6	320.5	189.4	113.9	89.8	71.5	61.2	43.1	36.0	18.9
1.80V	520.9	451.9	309.5	183.2	110.4	87.4	69.6	59.8	42.4	35.6	18.7
1.85V	433.2	380.3	269.2	165.3	101.7	81.2	65.0	56.0	39.9	33.5	17.8

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


RA6-180(6V180Ah)




Discharge Characteristics Curve

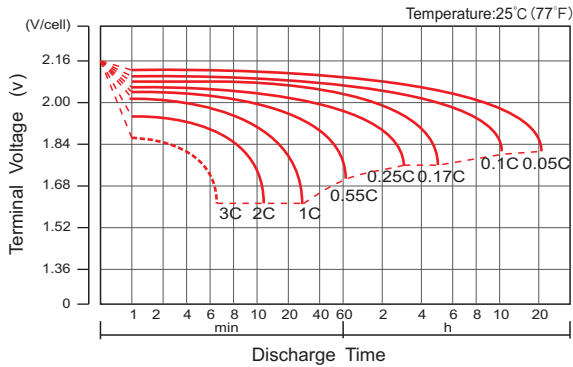


Charge Characteristic Curve For Standby Use

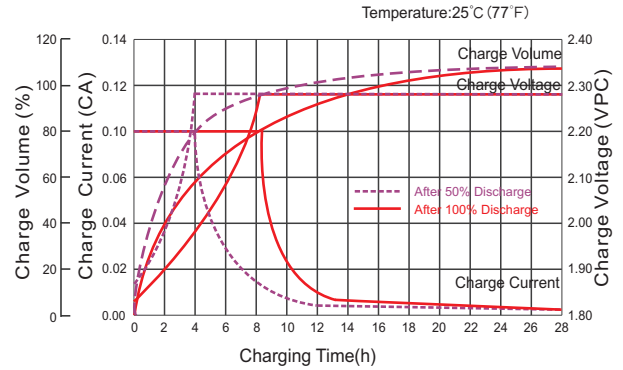


Cycle Life In Relation To Depth Of Discharge

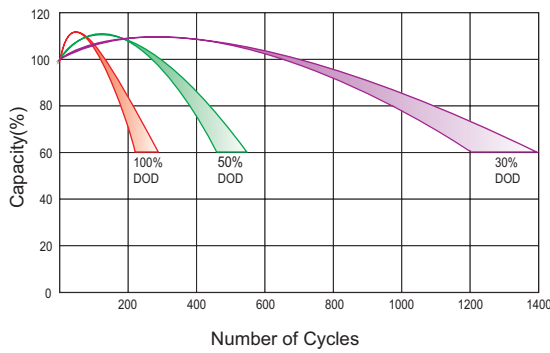


Relationship Between Charging Voltage And Temperature

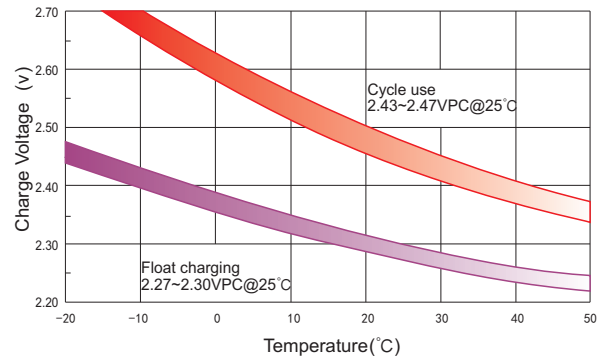


Temperature Effects On Capacity

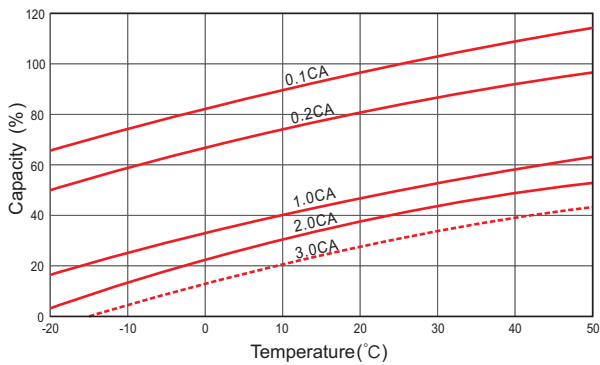


Storage Characteristics

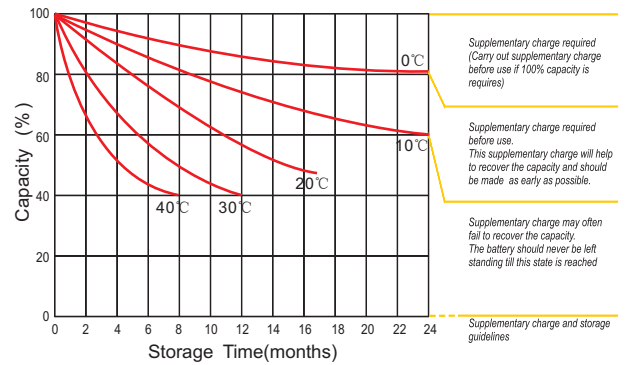

Effect Of Temperature On Long Term Life

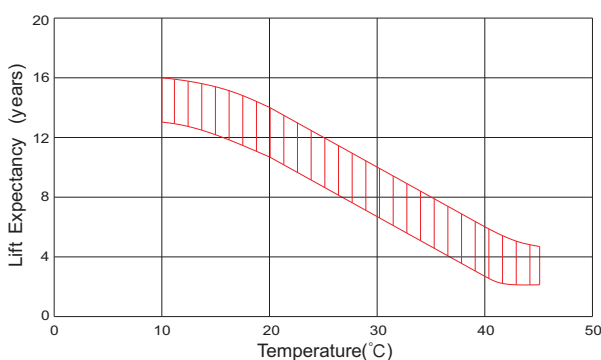

Life Characteristics Of Standby Use

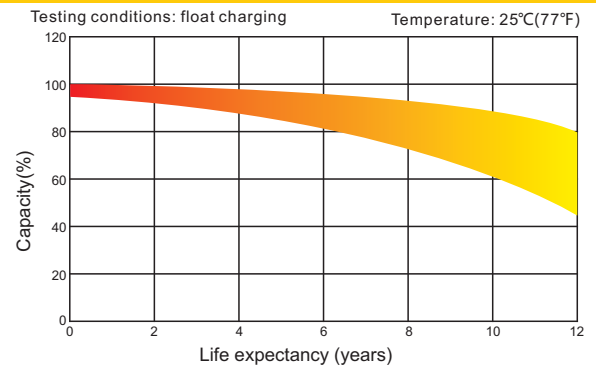

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain and update the latest information.